


## Valstop Spring Check Valve

With Polymeric Resin Jumper/Plate. Minimum working pressure 0.05 Bar (5 kPa)


| MATERIALS |                             |
|-----------|-----------------------------|
| PART      | MATERIAL                    |
| Body      | Brass CW 617N               |
| Plate     | Polymeric resin             |
| Seat      | NBR                         |
| Spring    | Stainless Steel<br>AISI 302 |

| SPECIFICATIONS          |           |
|-------------------------|-----------|
| Thread                  | BSP       |
| MAX Working Temperature | 100°C     |
| Cold Working Pressure   | See below |

Applications – Can be fitted in horizontal, vertical or oblique position.  
Suitable for Hot/Cold water, Oils.

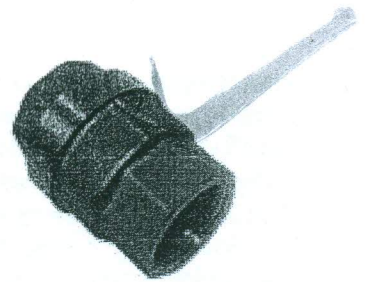

| Spring Type Check Valve Fig H.0151 |      |      |      |           |              |
|------------------------------------|------|------|------|-----------|--------------|
| CODE                               | SIZE | H    | L    | APPROX KG | PRESSURE BAR |
| BVVC/010                           | 10   | 46.5 | 28   | 0.083     | 40           |
| BVVC/015                           | 15   | 50   | 34   | 0.147     | 40           |
| BVVC/020                           | 20   | 59   | 41.5 | 0.218     | 30           |
| BVVC/025                           | 25   | 67   | 50   | 0.34      | 30           |
| BVVC/032                           | 32   | 76   | 60.5 | 0.551     | 25           |
| BVVC/040                           | 40   | 90   | 73.5 | 0.913     | 25           |
| BVVC/050                           | 50   | 101  | 89   | 1.414     | 25           |
| BVVC/065                           | 65   | 127  | 114  | 2.519     | 15           |
| BVVC/080                           | 80   | 150  | 137  | 4.447     | 15           |




## Foot Valve Strainer

| MATERIALS |                     |
|-----------|---------------------|
| PART      | MATERIAL            |
| Body      | Nylon               |
| Mesh      | 304 Stainless Steel |

| SPECIFICATIONS          |           |
|-------------------------|-----------|
| Thread                  | BSP       |
| MAX Working Temperature | 100°C     |
| Cold Working Pressure   | See below |

Applications – To convert Europa & Valstop, Spring Check Valves to Foot Valves

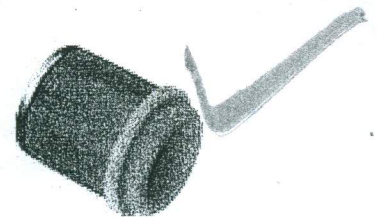

| Stainless Filter Fig H 0157 |      |      |                   |              |
|-----------------------------|------|------|-------------------|--------------|
| CODE                        | SIZE | L    | MESH SIZE MICRONS | APPROX GRAMS |
| BVVS/010                    | 10   | 46.5 | 1200µm            | 6            |
| BVVS/015                    | 15   | 50   | 1200µm            | 8            |
| BVVS/020                    | 20   | 57   | 1200µm            | 14           |
| BVVS/025                    | 25   | 62   | 1200µm            | 20           |
| BVVS/032                    | 32   | 68   | 1200µm            | 29           |
| BVVS/040                    | 40   | 78   | 1200µm            | 35           |
| BVVS/050                    | 50   | 90   | 1200µm            | 52           |
| BVVS/065                    | 65   | 97   | 2000µm            | 88           |
| BVVS/080                    | 80   | 110  | 2000µm            | 116          |
| BVVS/100                    | 100  | 128  | 2000µm            | 167          |

