

Annexure- A

Type of movement	reciprocating
Shaking stroke	30 mm
Permissible shaking weight (incl. attachment)	15 kg
Motor rating input	70 W
Motor rating output	19 W
Permissible ON time	100 %
Speed range	0 - 300 rpm
Speed display	7 segment LED
Timer	yes
Timer display	scale
Time setting range	1 - 55 min
Operating mode	timer and continuous operation
Dimensions (W x H x D)	505 x 120 x 585 mm
Weight	26 kg
Permissible ambient temperature	5 - 50 °C
Permissible relative humidity	80 %
Protection class according to DIN EN 60529	IP 21
RS 232 interface	yes
USB interface	USB-B
Voltage	230 V
Frequency	50/60 Hz
Power input	74 W
Fuse	2x T4A 250V

Annexure- **B**


Essential attachment

Dimensions (W x D x H): 480 x 500 x 120 mm

Set-up plate: 420 x 420 mm

Flask Capacity: 70 x 25 ml, 48 x 50 ml, 30 x 100 ml, 20 x 250 ml, 12 x 500 ml, 9 x 1000 ml, 4 x 2000 ml

Weight: 4000 g

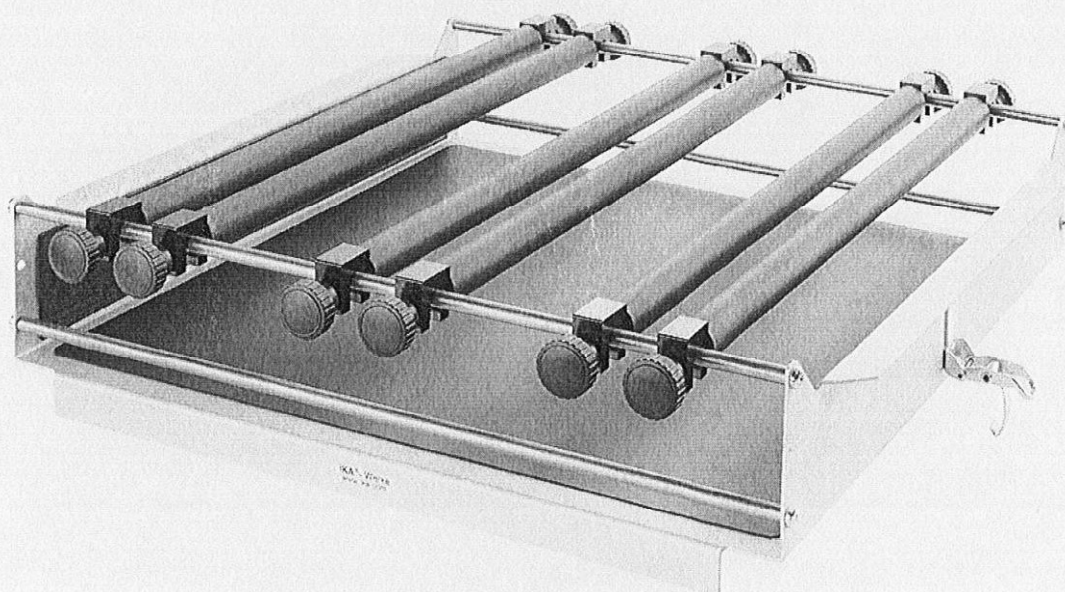

Annexure-

laboratory Horizontal shaker with large mounting surface and load capacity of up to 15 kg.

- Infinitely variable speed control from 0-300 rpm
- Digital display
- Orbital diameter 30 mm
- Ideal for all lying vessels, e.g. separating funnels
- Continuous operation (endless) even under extreme loads
- Timer function
- Attachments are not included in delivery, please order separately
- Integrated USB and RS 232 interface
- Platform size : 450 x 450 mm

Scope of delivery

- HS 501 digital
- USB A-B Cable

